




PROTRON ECLYPSE

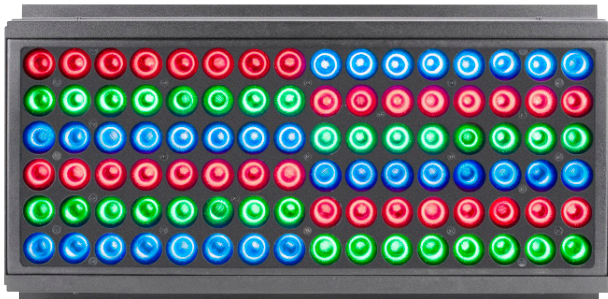

The PROTRON ECLYPSE™ is a versatile high powered 1000W air cooled IPX4 outdoor rated color blinder, strobe, wash luminaire. Features include (96) 10W CREE RGBW 4-in-1 LEDs, 31° beam / 63° field angles, 27,000+ total lumen output, brilliant eye candy effects, selectable pixel mapping zones, strobe intensity, duration, rate, and FX control, super high speed (1-25fps) adjustable strobe, DMX, RDM, Kling-NET, and Art-NET protocol support, 8/16 bit RGB and RGBW smooth color mixing modes, adjustable/removable yoke bracket with 3-position holes, interlocking system for multiple unit matrix designs, IP65 3/5pin DMX, RJ45 ethernet, IP65 Locking power in/out connections, 4-button control panel with OLED menu display, and a multi-voltage universal auto switching power supply (100-240v).

FEATURES

- Versatile Color Blinder, Strobe, Wash Luminaire
- High Powered 1000W Air Cooled IPX4 Outdoor Rated
- 96 10W CREE RGBW 4-in-1 LEDs
- 31° Beam / 63° Field Angles
- 27,000+ Total Lumen Output
- Brilliant Eye Candy Effects
- Selectable Pixel Mapping Control Zones
- Strobe Intensity, Duration, Rate, and FX Control
- Super High Speed (1-25fps) Adjustable Strobe
- DMX, RDM, Kling-NET and Art-NET Protocol Support
- 8/16 Bit RGB and RGBW Smooth Color Mixing Modes
- Adjustable/Removable Yoke Bracket w/3-Position Holes
- Interlocking System for Multiple Unit Matrix Designs



IPX4 Outdoor Rated

Specifications are subject to change without notice ©Elation Professional 08/12/20

Elation Professional USA | 6122 S. Eastern Ave. | Los Angeles, CA. 90040
323-582-3322 | 323-832-9142 fax | www.elationlighting.com | info@elationlighting.com

Elation Professional B.V. | Junostraat 2 | 6468 EW Kerkrade, The Netherlands
+31 45 546 85 66 | +31 45 546 85 96 fax | www.elationlighting.eu | info@elationlighting.eu

SPECIFICATIONS

SOURCE

(96) 10W CREE 4-in-1 RGBW LEDs
 15,000 Hour Average LED Life*

*May vary depending on several factors including but not limited to: Environmental Conditions, Power/Voltage, Usage Patterns (On-Off Cycling), Control, and Dimming.

PHOTOMETRIC DATA

31° Beam / 63° Field Angles
 27,000+ Total Lumen Output

EFFECTS

Color Blinder, Strobe, and Wash
 Brilliant Eye Candy Effects
 Selectable Pixel Mapping Control Zones
 Strobe Intensity, Duration, Rate, and FX Control
 Super High Speed (1-25fps) Adjustable Strobe
 8/16 Bit RGB and RGBW Smooth Color Mixing Modes

COLOR

RGBW

CONTROL / CONNECTIONS

Multiple DMX Channel Modes (24 total channels)
 4 Button Touch Control Panel with OLED Menu Display
 DMX, RDM, Kling-NET, and Art-NET Protocol Support
 IP65 3/5pin DMX and RJ45 ethernet In/Out
 IP65 Locking Power In/Out
 Fixture-to-Fixture Interlocking Alignment Pins/Locks

SIZE / WEIGHT

Length: 24.9" (633mm)
 Width: 7.0" (177.5mm)
 Vertical Height: 14.4" (364.8mm)
 Weight: 34.6 lbs. (15.7kg)

ELECTRICAL / THERMAL


AC 100-240V - 50/60Hz
 843W Max Power Consumption
 14°F to 113°F (-10°C to 45°C)

APPROVALS / RATINGS

CE | IPX4



PIXEL MAPPING CONTROL ZONES

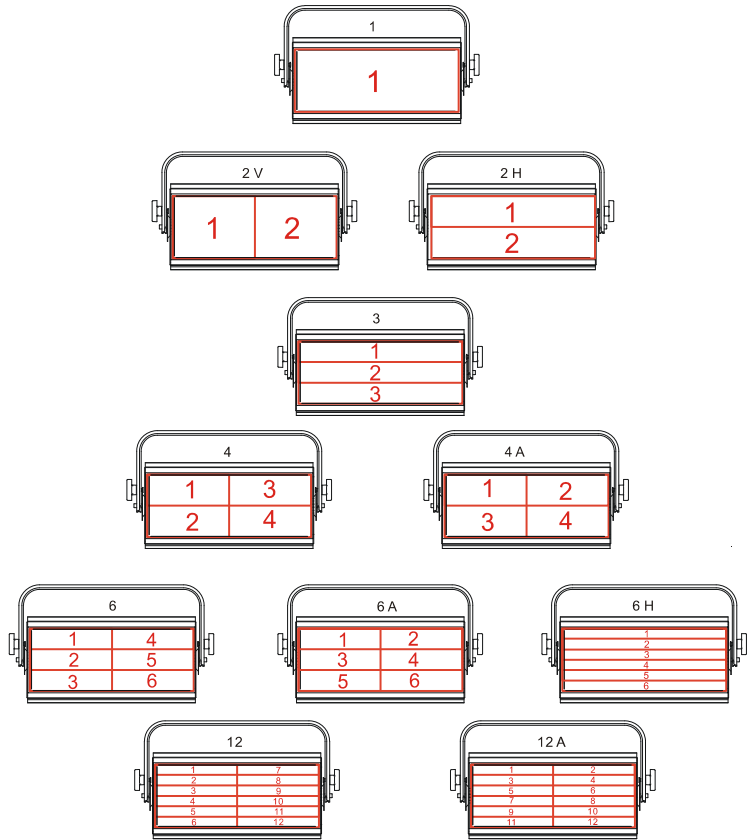

ORDERING INFORMATION

PRODUCT ORDER CODE	
PRO951	PROTRON ECLIPSE
OPTIONAL ACCESSORIES ORDER CODES	
DRCSATPRO	Touring Road Case for Satura Profile
TRIGGER CLAMP	Heavy Duty Wrap Around Hook Style Clamp
STR527	5 ft. (1.5m) IP65 Seetronic 5pin PRO DMX Cable
NEU088	3 ft. (1m) Power Link Cable
CAT005	5' (1.5m) CAT6 etherCON Cable
	Additional cable lengths available

Specifications are subject to change without notice ©Elation Professional 08/12/20



Elation Professional USA | 6122 S. Eastern Ave. | Los Angeles, CA. 90040
 323-582-3322 | 323-832-9142 fax | www.elationlighting.com | info@elationlighting.com

Elation Professional B.V. | Junostraat 2 | 6468 EW Kerkrade, The Netherlands
 +31 45 546 85 66 | +31 45 546 85 96 fax | www.elationlighting.eu | info@elationlighting.eu